

Please type a plus sign (+) inside this box [+]

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

	UTILITY PATENT APPLICATION (Only for new nonprovisional applications un	
Attorney Docket	No. <u>081862.P163</u>	Total Pages <u>5</u>
First Named Inve	ntor or Application Identifier John G. Ellis	
Express Mail Lab	el No. <u>EL371011129US</u>	11236 11236
ADDRESS TO:	Assistant Commissioner for Patents Box Patent Application Washington, D. C. 20231	1c542 U

APPLICATION	ELEMENTS
See MPEP ch	napter 600 concerning utility patent application contents.
1. <u>x</u>	Fee Transmittal Form (Submit an original, and a duplicate for fee processing)
2. <u>x</u>	Specification (Total Pages) (preferred arrangement set forth below) - Descriptive Title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claims - Abstract of the Disclosure
3. <u>x</u>	Drawings(s) (35 USC 113) (Total Sheets 3)
4. <u>x</u>	Oath or Declaration (Total Pages <u>5</u>)
	ax_ Newly Executed (Original or Copy)
	b Copy from a Prior Application (37 CFR 1.63(d)) (for Continuation/Divisional with Box 17 completed) (Note Box 5 below)
	i. DELETIONS OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5	Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6	Microfiche Computer Program (Appendix)
12/01/97	1 - PTO/SP/05 /12/07

7.	(if applicable a b c	Nucleotide and/or Amino Acid Sequence Submission e, all necessary) Computer Readable Copy Paper Copy (identical to computer copy) Statement verifying identity of above copies
		ACCOMPANYING APPLICATION PARTS
8. 9.	<u>x</u>	Assignment Papers (cover sheet & documents(s)) a. 37 CFR 3.73(b) Statement (where there is an assignee)
	X	b. Power of Attorney
10.		English Translation Document (if applicable)
11.	 	a. Information Disclosure Statement (IDS)/PTO-1449
		b. Copies of IDS Citations
12.		Preliminary Amendment
13.	_x	Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14.		a. Small Entity Statement(s)
		b. Statement filed in prior application, Status still proper and desired
15.		Certified Copy of Priority Document(s) (if foreign priority is claimed)
16.	_x	Other: A copy of the postcard w/express mail stamp.
17.	If a CONT	INUING APPLICATION, check appropriate box and supply the requisite information:
	Cor	tinuation Divisional Continuation-in-part (CIP)
		of prior application No: _
18.	Corres	pondence Address
	·	er Number or Bar Code Label
		(Insert Customer No. or Attach Bar Code Label here) or
x	Correct	ondence Address Below
	001163	Oriderice Address Below
NAM	¶E lohr	P. Ward – Reg. No.: 40,216
INCIV		KELY, SOKOLOFF, TAYLOR & ZAFMAN LLP
		KEET, SONOLOTT, TATEOTT & ZAI MAIN LEI
ADD	PRESS _	2400 Wilshire Boulevard
	_	Seventh Floor
CITY	Y Los Ange	les STATE California ZIP CODE 90025-1026
Cou	ntry U.S	.A. TELEPHONE (408) 720-8598 FAX (408) 720-9397

EXPRESS MAIL CERTIFICATE OF MAILING

Date of Deposit: Felono I hereby certify that I am of the deposited with the Unit "Express Mail Post Office the date indicated above a	ausing this paper or fee to ed States Postal Service to Addressee" service on
for Patents, Washington, I	
tatricia A. Ba	
Typed or printed name of	person mailing paper or fee)
(Signature of person maili	ng paper or fee)
(Date signed)	
Serial/Patent No.: *** Client: CISCO TECHNOLOGY, INC. Title: AAL-2 SWITCHED VOICE WAN	_ Filing/Issue Date: Herewith NETWORKING
BSTZ File No.: 081862.P163	Atty/Secty Initials: _JPW/TNF/pab
Date Mailed: 2/18/00	Docket Due Date:
	ent & Trademark Office on the date stamped hereon: Express Mail No.: EL371011129USE Check No. 33797
Amendment/Response (pgs.) Appeal Brief (pgs.) (in triplicate)	Month(s) Extension of Time Amt. \$768.00
Appeal Brief (pgs.) (in triplicate) Application - Utility (16 pgs., with cover and abstract)	Information Discksure Statement & PTO-1449 (_pgs.) KI Check No. 33798
Application - Rule 1.53(b) Continuation (pgs.)	☐ Issue Fee Transmittal Amt: \$40.00
Application - Rule 1.53(b) Divisional (pgs.)	☐ Notice of Appeal
Application - Rule 1.53(b) CIP (pgs.)	Petition for Extension of Time
Application - Rule 1.53(d) CPA Transmittal (pgs.)	Petition for
Application - Design (pgs.)	Nostcard Postcard
Application - PCT (pgs.)	Power of Attorney (pgs.)
Application - Provisional (pgs.)	Preliminary Amendment (pgs.)
Assignment and Cover Sheet	Reply Brief (pgs.)
Certificate of Mailing (Express Mail)	Response to Notice of Missing Parts
Declaration & POA (_5_ pgs.)	Small Entity Declaration for Indep. Inventor/Small Business
Disclosure Docs & Orig & Copy of Inventor's Signed Letter (pgs)	Transmittal Letter, in duplicate (2 pgs.)
Drawings: 3 # of sheets includes 3 figures	Fee Transmittal, in duplicate (2 pgs.)
☑ Other: <u>A copy of the postcare</u>	l w/express mail stamp (1 pg.)

APPLICATION FOR UNITED STATES LETTERS PATENT

for

AAL-2 SWITCHED VOICE WAN NETWORKING

Inventor: John G. Ellis

Prepared by:
BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN
12400 Wilshire Boulevard
Seventh Floor
Los Angeles, California 90025-1026
(408) 720-8300

Attorney Docket No. 81862.P163

"Express Mail" mailing label number: EL371011129US

Date of Deposit: February 18, 2000

I hereby certify that I am causing this paper or fee to be deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and that this paper or fee has been addressed to the Assistant Commissioner for Patents, Washington, D. C. 20231

Patricia A. Balero

(Typed or printed name of person mailing paper or fee)

145all/20

(Signature of person mailing paper or fee)

10

15

20

25

AAL-2 SWITCHED VOICE WAN NETWORKING

FIELD OF THE INVENTION

The present invention relates generally to the field of cell switching network communications and, more specifically, to a scheme for providing virtual user-network interfaces (UNIs) to allow standards-based signaling protocols for such networks to be used to manage the addition and deletion of AAL2 channel identifiers (CIDs) associated with sub-multiplexed AAL2 common part sublayer cells and to allow for interoperability with regular ATM networks.

BACKGROUND

The desire to integrate data, voice, image and video over high-speed digital trunks has led to the development of a variety of packet and cell switching techniques. One such technique is called Asynchronous Transfer Mode (ATM). ATM is a switching technology that provides users with the ability to connect to one or more users in a transparent fashion. Unlike the variable length packets used by frame relay services, ATM service is based on switching fixed length packets of data known as cells. Cell switching, as it is called, is gaining popularity for a variety of reasons. First, switch architectures can be optimized to switch cells at much higher speeds than variable length packets. Second, multiple services requiring a variety of qualities of service guarantees can be provided simultaneously. ATM user traffic is first segmented into fixed length cells, transmitted, then reassembled back into its original form. This segmentation and reassembly (SAR) process is done in a standardized way, regardless of the carrier providing the ATM service.

Although the use of fixed length cells in ATM can be efficient in terms of allowing standardized switching apparatus to be used, for many applications the standard

20

25

5

10

53-byte cell provides too large a package for the data (e.g., compressed voice) requiring transport through the network. As a result, much of the cell payload is merely "padding" and the transport of such padding wastes the available bandwidth of the ATM network. Several approaches to solve this problem present themselves.

For example, one could use a shorter length cell. As indicated, ATM uses a standard 53-byte cell, with 48-bytes of payload and 5-bytes of header information. Choosing a smaller cell size could result in less of the cell payload being filled by padding. However, shorter cells have two important disadvantages. First, such cells would be non-standard and, as a result, such cells could not be transported through ATM networks designed to accommodate only standard size cells. This lack of interoperability would likely mean that users would be disinclined to accept such a solution. Second, smaller cells would likely end up wasting more bandwidth than they would save because the ratio of header size to payload is much higher than for a 53-byte cell. Unfortunately, the header size could probably not be reduced from the current 5-byte size without a loss of functionality.

Another solution might be to use variable length packets, as is common in frame relay networks. This could conceivably avoid the need for padding altogether because packets could be "custom built" to the requirements of the user data. Unfortunately, the very fact that such varying packet sizes are allowed within frame relay networks means that the switches used to transport the packets across the network must be more complex than their ATM counterparts. As a result, such switches are generally slower than ATM switches. Further, in networks where variable length packets are used, it is difficult to make real time service guarantees without the use of complex servicing and queuing algorithms and some limitations on packet size.

Yet another solution might be to pack multiple payloads into one cell at a source and then pull these payloads apart at a destination. The ATM Forum has promulgated a standard regarding such bundling of data channels within a single cell, entitled "ATM

10

15

Trunking Using AAL2 for Narrowband Services", AF-VOTA-0113.000 (Feb. 1999), which is incorporated herein by reference. AAL2 (ATM Adaptation Layer type 2) provides a standards-based approach for multiplexing multiple voice channels on a single virtual circuit (VC) between two points. Thus, it provides for conserving bandwidth where the use of standard ATM cells might be wasteful. For this reason, AAL2 is a desirable solution for bringing ATM service to customer premises.

However, carriers wishing to bring such services up to the customer premises face other challenges. For example, existing ATM hardware (e.g., switches and the like) cannot accommodate the sub-multiplexed packets that make up an AAL2 cell.

Furthermore, the installed base of signaling protocols (i.e., the process by which ATM users and the network exchange control information, request the use of network resources, or negotiate for the use of circuit parameters) are designed for use with 53-byte ATM cells and will not readily accommodate multiple AAL2 sub-cells. Accordingly, what is needed is a scheme for allowing the use of switched AAL2 up to the customer premises using a protocol set for networking the AAL2 connections which is fully consistent with those that are used to manage connection set ups across a regular ATM network.

081862.P163

-4-

SUMMARY OF THE INVENTION

An ATM node is configured to dynamically establish ATM adaptation layer 2 (AAL2) channel identifiers (CIDs) on a call-by-call basis using standards-based call control signaling protocols mapping CIDs to a virtual path/virtual channel (VP/VC) within an ATM standard call control protocol.

10

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example and not limitation in the figures of the accompanying drawings, in which like references indicate similar elements, and in which:

Figure 1 illustrates an example of the use of AAL2 communication paths at the edges of an ATM network in accordance with an embodiment of the present invention;

Figure 2 illustrates an example of the establishment of a virtual UNI at the edge of an ATM network by demultiplexing AAL2 payloads using an ATM standard connection management protocol mapping the CID identifier into the connection reference field of the protocol in accordance with an embodiment of the present invention; and

Figure 3 illustrates an example of mapping signaling, control and AAL2 sub-cell payloads onto a signal VC in accordance with an embodiment of the present invention.

10

15

20

25

DETAILED DESCRIPTION

A scheme for using a virtual UNI (user network interface) to allow standards-based signaling protocols (e.g., Q.2931) to be used to manage the addition and deletion of AAL2 channel identifiers (CIDs) associated with sub-multiplexed AAL2 common part sublayer cells (sub-cells) is described herein. The present scheme may also be adapted for use with other data communication schemes, such as frame relay or voice over IP (Internet Protocol). Therefore, although in the following description the present invention will be described with reference to specific exemplary embodiments thereof, it should be kept in mind that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention as set forth in the appended claims.

As mentioned above, AAL2 provides a standards-based method of efficiently carrying small voice packets, of varying size, over an ATM VCC (virtual channel connection) using a sub-multiplexing system addressing scheme. Carriers now face the problem of designing end-to-end switched voice solutions based on an ATM PNNI (private network to network interface) core network and ATM switching fabrics designed to handle the standard 53-byte cells, while still making use of the AAL2 multiplexing protocol to gain bandwidth efficiencies over CPE (customer premises equipment)-to-network communication links. The present scheme allows for such implementations by providing an algorithmic mapping between the VP/VC (virtual path/virtual circuit) that is referenced (e.g., in a cell header) in standards-based Q.2931/UNI protocols to the CID of sub-multiplexed cells within an AAL2 stream. Through this mechanism, it is possible to provide an end-to-end switched voice network service using PNNI or any other standard ATM networking protocol to establish end-to-end voice connectivity. This same concept can be extended to support frame relay or Internet protocol network connections to an ATM PNNI network.

081862.P163 -7-

10

15

20

25

In order to more fully appreciate the advantages offered by the present scheme, some background is helpful. For example, much of the following discussion will make reference to the use of standards-based ATM signaling protocols. Signaling is the process by which ATM users and an ATM network exchange control information, request the use of network resources, or negotiate for the use of circuit parameters. Some protocols support so-called connection control signaling. In these schemes, messages are sent over a Signaling ATM Adaptation Layer (SAAL), which ensures their reliable delivery. The SAAL is divided into a Service Specific Part and a Common Part. The Service Specific Part is further divided into a Service Specific Coordination Function (SSCF), which interfaces with the SSCF user; and a Service Specific Connection-Oriented Protocol (SSCOP), which assures reliable delivery.

The UNI signaling protocols within the SAAL are responsible for ATM call and connection control, including call establishment, call clearing, status enquiry, and point-to-multipoint control. A signaling message is sent in a standard message format and is made up of a message header and a variable number of Information Elements (IEs) in its payload. The message header includes a protocol discriminator (to identify the signaling protocol being used) along with identifying information for the message type (of which there are several) and length.

One particular standards-based signaling protocol is based on Recommendation Q.2931, promulgated by the International Telecommunications Union (ITU). Although this protocol will be referred to throughout, it should be understood that other protocols, and in particular the UNI 3.1/4.0 as promulgated by the ATM Forum, may also be used. Therefore, this specification should be read as including UNI 3.1/4.0 wherever Q.2931 is referenced.

The Q.2931 signaling protocol specifies the procedures for the establishment, maintenance and clearing of network connections at the B-ISDN (broadband integrated services digital network) user network interface. The procedures are defined in terms of

081862.P163 -8-

10

15

20

25

messages exchanged and the basic capabilities supported by Q.2931 signaling include switched virtual channel (SVC) connections, point-to-point switched channel connections, and VCI (virtual channel identifier) negotiation. Q.2931 cells include a "call reference" field, which is a unique number for every ATM connection that serves to link all signaling messages relating to the same connection. It also identifies the call at the local user network interface to which the particular message applies.

Returning now to the present scheme, call set up at the CPE may be allowed to occur through the signaling process normally associated with the standards-based protocol (e.g., Q.2931 or UNI 3.1/4.0) in use. For example, and referring to **Figure 1**, a network 10 may be dynamically established with a voice system controller (VSC) 12. The VSC 12, in conjunction with a PNNI/SVC network, is responsible for translating call request based on dialed digits and selecting a specific output voice port. This information is used by the voice end point to make an SVC connection set up request into the ATM network 18. The VSC 12 determines the destination end point. The ATM network 18 is responsible for establishing the connection. Typically in this type of networking the actual ATM connection is made from the destination back to the actual origination port.

The end-points may include network edge devices 14 that communicate with traditional time division multiplexed (TDM) CPE and provide TDM-to-AAL2 conversion in accordance with the relevant ATM Forum standards for such processes. Based on a call request from one of these network edge devices 14, the VSC determines the ATM address (e.g., an NASP address) of the origination device (e.g., through a look-up process to access a cache or by querying the network or the edge device) and provides this information to the destination network edge device. In addition, the origination network edge device selects, as part of the connection set up message, a VC and available CID within this VC for the call and provides this information with its ATM address in the connection request message. At this point, call connection is complete. The call tear

-9-

10

15

20

25

down process follows a similar protocol between the network edge devices 14 and the VSC 12.

Although ATM AAL2 is used at the network edges, e.g., between network edge devices 14 and network access gateways 16, conventional ATM and PNNI networking (e.g., using 53-byte cells) is used within the core ATM network 18. Although the transport of compressed voice within the core may, therefore, be somewhat wasteful of bandwidth, this bandwidth is relatively plentiful and inexpensive as compared to the available bandwidth outside core ATM network 18. Furthermore, the need for functional flexibility within the core network 18 outweighs the desire for bandwidth savings that might be achieved using AAL2. Thus, the network access gateways 16 will be responsible for demultiplexing the AAL2 streams to conventional ATM cells and for mapping these streams to a VP/VC associated with the call. Because the gateways 16 provide this mapping, the switched connection across the core ATM network 18 can be performed using ATM switching and standards-based PNNI SVC networking, which is well known in the art. VSC 12 is involved only at the network edge and manages the voice gateway function between the CPE (e.g., TDM voice switches) and the ATM network 10.

Turning now to **Figure 2**, further details of the functions performed at network edge device 14 and network access gateway 16 can be explored. These two entities are communicatively coupled through a virtual path (VP) 20 as shown. This VP 20 carries not only the multiplexed AAL2 cells, but also the signaling information (e.g., formatted in accordance with the Q.2931 standard or another signaling protocol) and network management information 34 (formatted in accordance with the well known Interim Local Management Interface (ILMI) or Local Management Interface (LMI) protocols). The network management interface 34 provides a mechanism to allow for, among other things, network address prefix exchange.

At the network edge device 14, incoming voice information from the channels (e.g., DS0s) associated with the CPE are multiplexed to form AAL2 cells by a multiplexing function 20. Signaling block 22 provides the call set up processes and this process resembles the typical call set up for a UNI SVC (switched virtual circuit), which is a well-known procedure in the art. Unlike the typical UNI SVC call set up process, however, the present scheme maps (in a manner transparent to the signaling software) the VP/VC associated with a virtual UNI port 24 to a CID on the designated AAL2 VCC that forms part of the virtual UNI virtual path 20. This mapping is performed using a mapping function 26. One example of such a mapping function is as follows:

Type 2 CPS

10

V	oice Port No.	<u>VPI/VCI</u>	<u>CID</u>
_	1	0/32	8
15	2	0/33	9
10	3	0/34	10
	•	•	•
	•	•	•
	•	•	•
20	255	0/287	255

Type 3 (e.g., where all Type 2/3 AAL2 cells are mapped tot he same VCI)

	Protocol	<u>VPI/VCI</u>	<u>CID/UUI</u>
	ILMI	0/16	1/16
25	Signalling Channel	0/5	1/17

The access point 16 to the ATM network is determined to be the point at which the composite AAL2 stream is demultiplexed into a number of VCCs. Each VCC maps directly to a CID identifier associated with a common part sublayer (CPS) voice payload using a reverse mapper 28. The reverse mapper 28 receives the VP/VC-to-CID mapping information from the signaling block 30 and using this information the demultiplexer 32

081862.P163

30

10

15

20

25

demultiplexes the AAL2 stream into multiple ATM VP/VCs. One voice channel is carried per VCC.

The functional blocks described above also provide reverse operation for duplex communication. For example, blocks 20 and 32 each provide multiplexing and demultiplexing operations for the AAL2 cells. Further, the functions provided by the mapping blocks 26 and 28 are bi-directional, allowing mappings both to and from the AAL2 streams. Further, the signaling units 22 and 30 and network management interface blocks 34 are fully bi-directional.

Furthermore, the functionality provided by each of these blocks may be implemented in hardware, software or a combination of both. For example, a general-purpose processor may be programmed to perform these functions. Thus, the functions may be embodied as computer readable instructions stored or otherwise recorded on a computer readable medium, such as a memory, disk drive or CD-ROM. In other embodiments, application specific integrated circuits (ASICs) and/or specially programmed field programmable gate arrays (FPGAs) or the like may be used. Thus, the functionality may be embodied in so-called firmware, to be loaded when the associated component is booted up.

To the PNNI controller associated with the core ATM network 18, the output of the demultiplexed AAL2 stream and the signaling channel present a Virtual UNI 24 to the core network. In some cases, this combination may map directly to a pure ATM SVC-controlled virtual interface. The PNNI controller may then establish connections across the network 18 using conventional PNNI networking protocols in the same way that a network connection would be established for any other ATM connection.

In addition to providing a method for managing the addition and deletion of CIDs, the present scheme also provides further benefits. For example, when applied to an ATM network using ATM cell switching, the associated PNNI networking and Q.2931/UNI 3.1/4.0 call control, the present protocol to manage CIDs is consistent with protocols used

-12-

081862.P163

TERROR TO A SECOND TO A SECON

10

15

20

in the remainder of the network. The higher level protocols that sit on top of the signaling layer (e.g., a voice switching application, etc.) and the controllers that are used to provide address resolution operate in exactly the same fashion with the present mechanism as they would in a conventional ATM cell switched network.

Thus, a scheme for using a Virtual UNI to allow standards-based signaling protocols to be used to manage the additional and deletion of AAL2 CIDs associated with sub-multiplexed AAL2 cells has been described. In the foregoing specification, the invention has been described with reference to specific exemplary embodiments thereof. It will, however, be clear that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention as set forth in the appended claims. For example, in addition to using a Virtual UNI, it is possible to map all signaling, control and/or AAL2 sub-cell payloads into a signal VC as shown in Figure 3. The AAL2 multiplexer/demultiplexer 20, VP/VC-to-CID mapper 26, Q.2931 signaling block 22 and ILMI interface block 34 operate in the fashion discussed above. Data is passed to the CID multiplexer 40 from the VP/VC-to-CID mapper 26 using Type 2 messages. Signaling and network management messages are passed from the signaling block 22 and interface block 34, respectively, using AAL5 Type 3 messages. The CID multiplexer 40 may than multiplex these messages onto a signal VC, the ILMI and Q.2931 messages being carried within the AAL2 VC using the Frame mode service as defined in ITU Recommendation I.366.2, section 8.3. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

CLAIMS

What is claimed is:

- 1 1. A method comprising dynamically establishing ATM adaptation layer 2 (AAL2)
- 2 channel identifiers (CIDs) on a call-by-call basis using ATM standards-based call control
- 3 signaling protocols.
- 1 2. The method of claim 1 further comprising mapping the CIDs to a virtual
- 2 path/virtual channel (VP/VC) that forms part of a virtual user network interface (UNI) to
- 3 an ATM network.
- 1 3. An ATM node configured to dynamically establish ATM adaptation layer 2
- 2 (AAL2) channel identifiers (CIDs) on a call-by-call basis using ATM standards-based
- 3 call control signaling protocols.
- 1 4. The ATM node of claim 3 further configured to map each of the CIDs to a virtual
- 2 path/virtual channel (VP/VC) that forms part of a virtual user network interface (UNI) to
- 3 an ATM network.
- 1 5. A method comprising mapping ATM adaptation layer 2 (AAL2) channel
- 2 identifiers (CIDs) to a virtual path/virtual channel (VP/VC) within a standards-based
- 3 ATM call control protocol.
- 1 6. The method of claim 5 wherein the standards-based ATM call control protocol is
- 2 selected from the list comprising UNI 3.1/4.0 and Q.2931.
- 1 7. The method of claim 5 wherein the mapping is performed at a network edge
- 2 device communicatively coupled to customer premises equipment.

- 1 8. The method of claim 7 wherein the network edge device is communicatively
- 2 coupled to the customer premises equipment over time division multiplexed
- 3 communication channels.
- 1 9. The method of claim 8 further comprising mutliplexing the time division
- 2 multiplexed communication channels to one or more AAL2 VPs/VCs.
- 1 10. The method of claim 9 further comprising mapping the one or more AAL2
- 2 VPs/VCs to the CIDs prior to mapping the CIDs to the VP/VC.
- 1 11. Computer-readable instructions, which when implemented by a processor, cause
- 2 the processor to map ATM adaptation layer 2 (AAL2) channel identifiers (CIDs) to a
- 3 virtual path/virtual channel (VP/VC) within a standard-based ATM call control protocol.
- 1 12. A computer-readable medium embodying the computer-readable instructions of
- 2 claim 11.
- 1 13. The computer-readable instructions of claim 11 further comprising additional
- 2 instructions, which when implemented by the processor, cause the processor to multiplex
- 3 one or more time division multiplexed communication channels to one or more AAL2
- 4 VPs/VCs prior to mapping the AAL2 CIDs to the VP/VC.
- 1 14. The computer-readable instructions of claim 13 further comprising yet more
- 2 instructions, which when executed by the processor, cause the processor to map the one
- 3 or more AAL2 VPs/VCs to the CIDs prior to mapping the CIDs to the VP/VC.


ABSTRACT

An ATM node is configured to dynamically establish ATM adaptation layer 2 (AAL2) channel identifiers (CIDs) on a call-by-call basis using standards-based call control signaling protocols mapping CIDs to a virtual path/virtual channel (VP/VC) within an ATM standard call control protocol.

081862.P163

-16-

50 SHEETS 100 SHEETS 200 SHEETS 22-141 22-142 22-144 AMPAD The state of the s

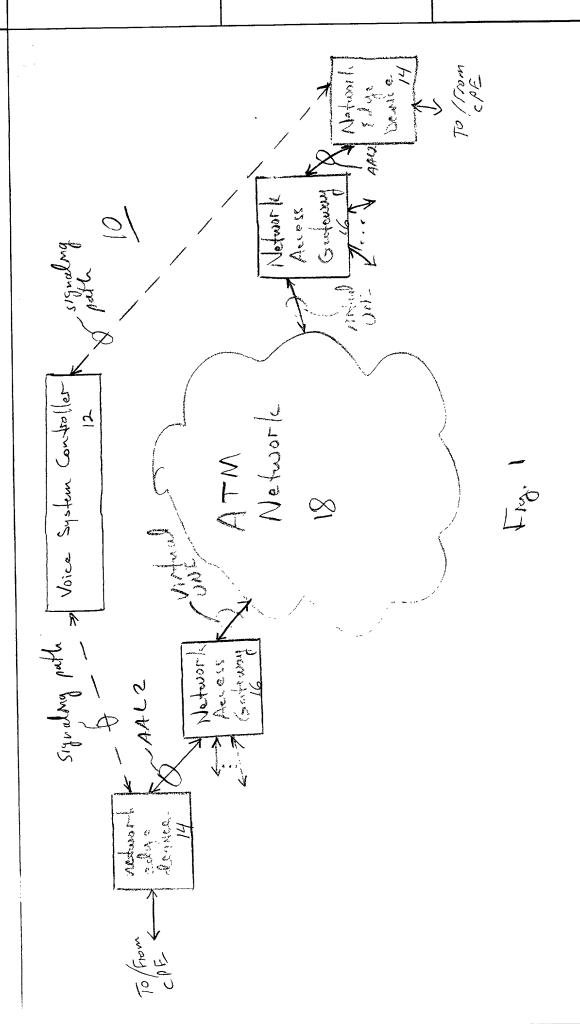

5 81 AACIN GO S WORLD N. C. CH 3/0/ P. Mary APL 2 mux/demmx VP/VC-to-CID Mappes Jobsta - Chris Q, 293 20 SQ.

Attorney's Docket No.: <u>081862.P163</u> Patent

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

AAL-2 SWITCHED VOICE WAN NETWORKING

the specification of which

<u>X</u>	is attached hereto.	
	was filed onas	3
	United States Application Number	
	or PCT International Application Number	
	and was amended on	
	(if applicable)	

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priorit <u>Claim</u>	
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
I hereby claim the benefit ur provisional application(s) lis		Code, Section 119(e) of any	United S	states
(Application Number)	Filing Date			
(Application Number)	Filing Date			
of Title 35, United States Co known to me to be material	ode, Section 112, I acknow to patentability as defined available between the filin	n the manner provided by the vledge the duty to disclose all in Title 37, Code of Federal F ng date of the prior application	informati Regulatio	ion ns,
(Application Number)	Filing Date	(Status patented, pending,		ned)
(Application Number)	Filing Date	(Status patented, pending,		 ned)
part of this document) as m	y respective patent attorne to prosecute this applicat	reto (which is incorporated by eys and patent agents, with fu ion and to transact all busines	ill power	of
Send correspondence to	Tarek N. Fahmi (Name of Attorney or Ag	, BLAKELY, SOKOL	OFF, TA	YLOR &
ZAFMAN LLP, 12400 Wilst telephone calls to <u>Tare</u>	hire Boulevard 7th Floor	, Los Angeles, California 90 , (408) 720-8598.	025 and	direct

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/Fi	rst Inventor <u>John G. Ell</u>	is			
Inventor's Signature	John G	Elli	Date _	2/10/2000	
Residence	Pleasanton, California		Citizenship	Canadian	
	(City, State)			(Country)	
Post Office Address	3219 Belvedere Court				
	Pleasanton, California	94588			

APPENDIX A

William E. Alford, Reg. No. 37,764; Farzad E. Amini, Reg. No. P42,261; Aloysius T. C. AuYeung, Reg. No. 35,432; William Thomas Babbitt, Reg. No. 39,591; Carol F. Barry, Reg. No. 41,600; Jordan Michael Becker, Reg. No. 39,602; Bradley J. Bereznak, Reg. No. 33,474; Michael A. Bernadicou, Reg. No. 35,934; Roger W. Blakely, Jr., Reg. No. 25,831; Gregory D. Caldwell, Reg. No. 39,926; Ronald C. Card, Reg. No. P44,587; Thomas M. Coester, Reg. No. 39,637; Stephen M. De Klerk, under 37 C.F.R. § 10.9(b); Michael Anthony DeSanctis, Reg. No. 39,957; Daniel M. De Vos, Reg. No. 37,813; Robert Andrew Diehl, Reg. No. 40,992; Matthew C. Fagan, Reg. No. 37,542; Tarek N. Fahmi, Reg. No. 41,402; James Y. Go, Reg. No. 40,621; James A. Henry, Reg. No. 41,064; Willmore F. Holbrow III, Reg. No. P41,845; Sheryl Sue Holloway, Reg. No. 37,850; George W Hoover II, Reg. No. 32,992; Eric S. Hyman, Reg. No. 30,139; Dag H. Johansen, Reg. No. 36,172; William W. Kidd, Reg. No. 31,772; Erica W. Kuo, Reg. No. 42,775; Michael J. Mallie, Reg. No. 36,591; Andre L. Marais, under 37 C.F.R. § 10.9(b); Paul A. Mendonsa, Reg. No. 42,879; Darren J. Milliken, Reg. 42,004; Lisa A. Norris, Reg. No. P44,976; Chun M. Ng, Reg. No. 36,878; Thien T. Nguyen, Reg. No. 43,835; Thinh V. Nguyen, Reg. No. 42,034; Dennis A. Nicholls, Reg. No. 42,036; Kimberley G. Nobles, Reg. No. 38,255; Daniel E. Ovanezian, Reg. No. 41,236; Babak Redjaian, Reg. No. 42,096; William F. Ryann, Reg. 44,313; James H. Salter, Reg. No. 35,668; William W. Schaal, Reg. No. 39,018; James C. Scheller, Reg. No. 31,195; Jeffrey Sam Smith, Reg. No. 39,377; Maria McCormack Sobrino, Reg. No. 31,639; Stanley W. Sokoloff, Reg. No. 25,128; Judith A. Szepesi, Reg. No. 39,393; Vincent P. Tassinari, Reg. No. 42,179; Edwin H. Taylor, Reg. No. 25,129; John F. Travis, Reg. No. 43,203; George G. C. Tseng, Reg. No. 41,355; Joseph A. Twarowski, Reg. No. 42,191; Lester J. Vincent, Reg. No. 31,460; Glenn E. Von Tersch, Reg. No. 41,364; John Patrick Ward, Reg. No. 40,216: Charles T. J. Weigell, Reg. No. 43,398; Kirk D. Williams, Reg. No. 42,229; James M. Wu, Reg. No. P45,241; Steven D. Yates, Reg. No. 42,242; Ben J. Yorks, Reg. No. 33,609; and Norman Zafman, Reg. No. 26,250; my patent attorneys, and Andrew C. Chen, Reg. No. 43,544; Justin M. Dillon, Reg. No. 42,486; Paramita Ghosh, Reg. No. 42,806; and Sang Hui Kim, Reg. No. 40,450; my patent agents, of BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP, with offices located at 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025, telephone (310) 207-3800, and James R. Thein, Reg. No. 31,710, my patent attorney.

APPENDIX B

Title 37, Code of Federal Regulations, Section 1.56 <u>Duty to Disclose Information Material to Patentability</u>

- (a) A patent by its very nature is affected with a public interest. The public interest is best served. and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclosure information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclosure all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:
 - (1) Prior art cited in search reports of a foreign patent office in a counterpart application, and
- (2) The closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.
- (b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made or record in the application, and
- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
 - (2) It refutes, or is inconsistent with, a position the applicant takes in:
 - (i) Opposing an argument of unpatentability relied on by the Office, or
 - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

- (c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:
 - (1) Each inventor named in the application;
 - (2) Each attorney or agent who prepares or prosecutes the application; and
- (3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.
- (d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.